

ABSOLUTE CONTROL



coulisse

since 1992

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form, by any means, electronic, mechanical, photocopying, recording, digital or otherwise without the written permission of the publisher. Although this publication has been composed with the utmost care, Coulisse B.V. does not accept any responsibility for damage due to mistakes and/or faults in this publication. Coulisse B.V. reserves the right to revise this publication and to revise and/or change its content at any time, without obligation to notify any person or entity of such revisions or changes. The most recent version replaces older versions of this publication. The most recent version is available at the Coulisse customer portal or your Coulisse contact. Please send your remarks and/or comments about this publication to info@coulisse.com.

© Copyright Coulisse

INDEX

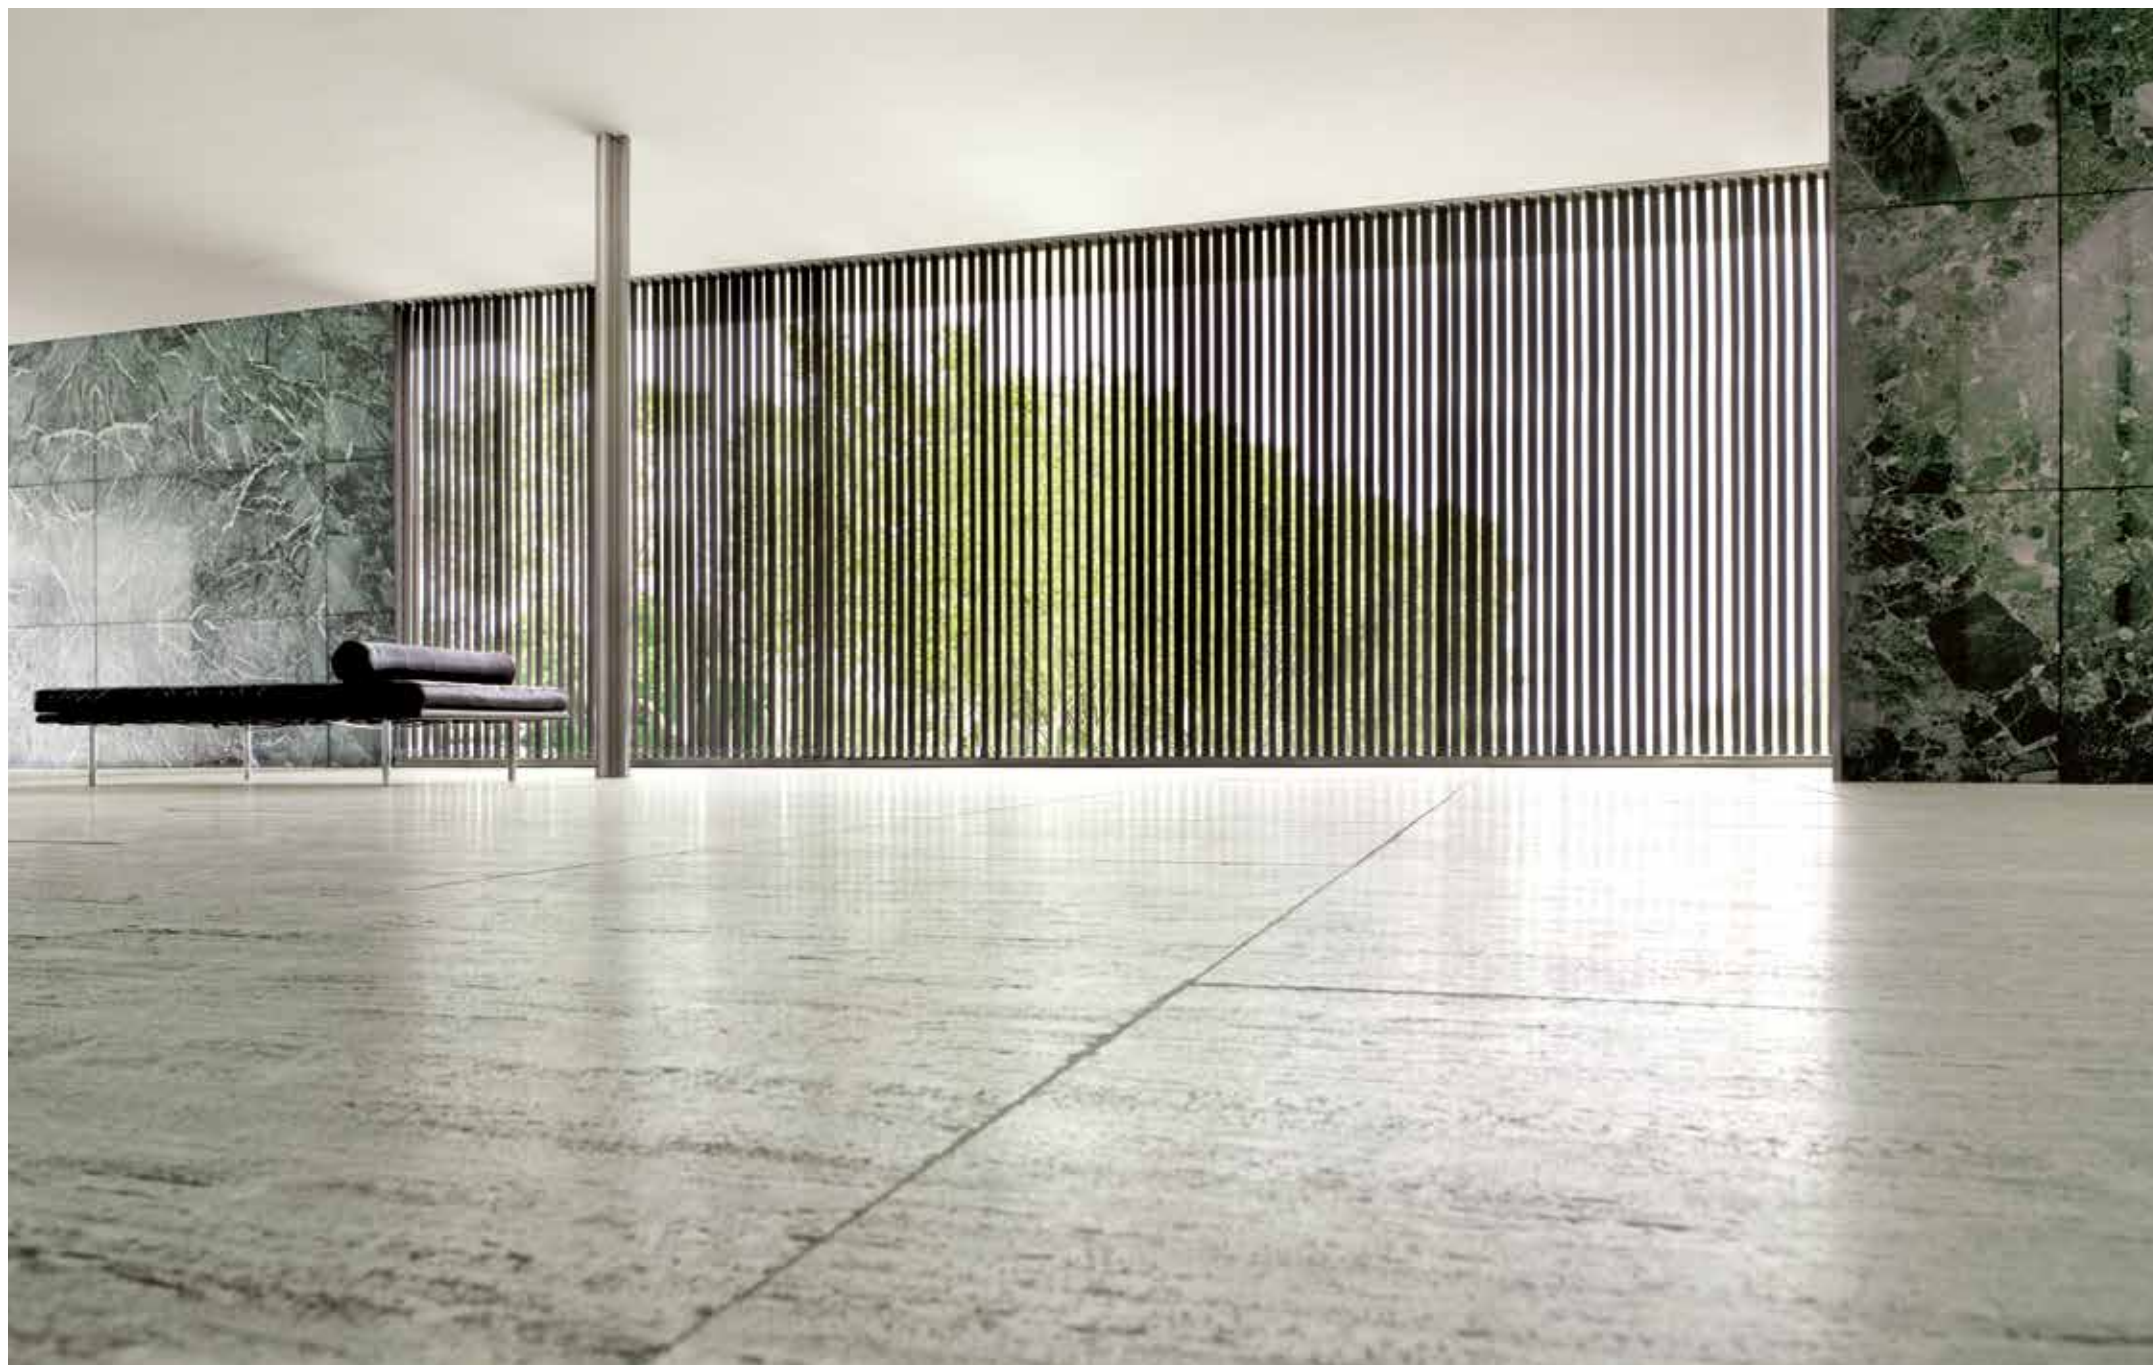
Absolute Control	4
Overview range	6
DC motors	9
AC motors	35
Controls	57
Power supplies	69
Selection table & overview	77
Information & documentation	87

Download this brochure
at coulisse.com

ABSOLUTE CONTROL

a revolutionary range for the automation
of window coverings

Absolute Control is a revolutionary system for the automation of blinds. It is characterized by easy and efficient installation, programming and operation. The system works on radiofrequency which allows for wireless programming and operation from a distance. The range offers motors for all Coulissee blind systems, which can be operated with the same remote control. The compact motors have unique patented features and were designed for aesthetic integration in the blind systems. All DC motors can be connected to battery or rechargeable battery tube for a completely wireless installation.



OVERVIEW RANGE

solutions for all blind types

General information

- One remote control to operate all applications
- Bi-directional 2.4 Ghz radio
- Voltage range from 12V to 24V DC
- AC and DC (power supply/battery/rechargeable battery tube)
- Compatible with home automation

Easy installation

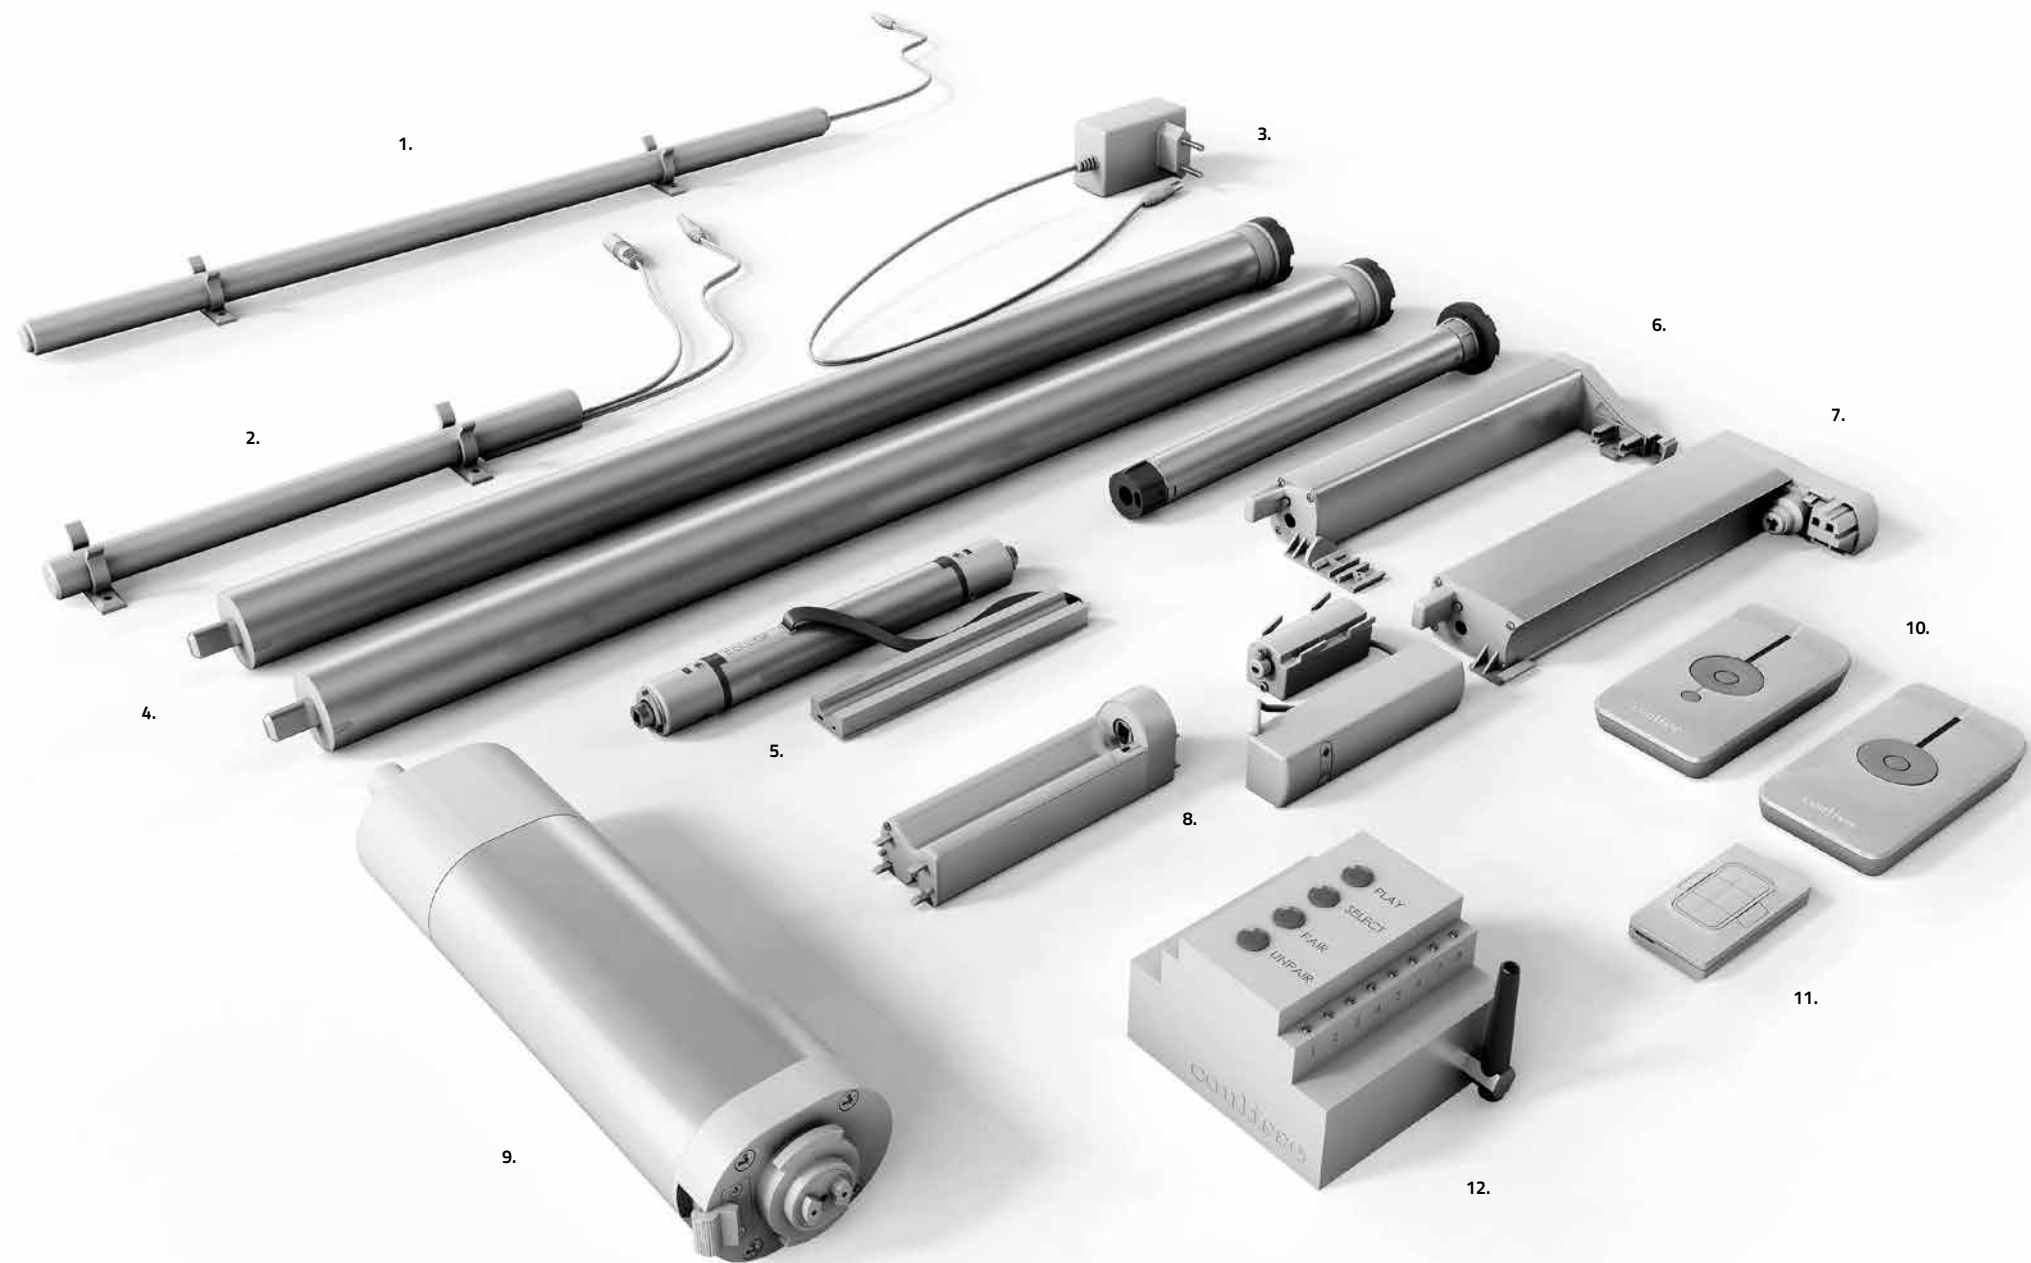
- Compact design for aesthetic integration
- No extra modules required
- Self learning motors

Easy programming and operation

- Wireless programming without touching the motor
- Create a network with an infinite number of blinds
- Programme and operate blinds simultaneously or separately

1. Power supplies battery tube
2. Rechargeable battery tube **NEW**
3. Adapter
4. Tubular motors
5. Middle motor
6. Panel motor
7. Vertical motor
8. Tilt-only motors
9. Curtain motor
10. Remote controls
11. Wall switch **NEW**
12. Domotica box





DC MOTORS

specifications





ABC-02


tilt-only motor 25 mm





- Easy assembly
- Unique battery changing system
- Completely wireless
- Integrated battery box
- RF module integrated into the motor
- Suitable for 19 x 27 mm and 25 x 25 mm head rail
- Silent operation


SPECIFICATIONS

Battery type	4 x AAA 1.5V alkaline	
Max. weight blind	6 kg	13.2 lb
Operating temperature	5 - 60°C	41 - 140°F
Max. channels to pair	32	
Weight	65 g	2.3 oz
Radio frequency	2.4 Ghz (bi-directional)	
Suitable for home automation	No	
Product certificate	CE	
Head rail size	25 mm x 25 mm 19 mm x 27 mm	1,0 in x 1.0 in 0,7 in x 1.1 in
Tilt-rod size	D-shape 4 mm	D-shape 0.16 in

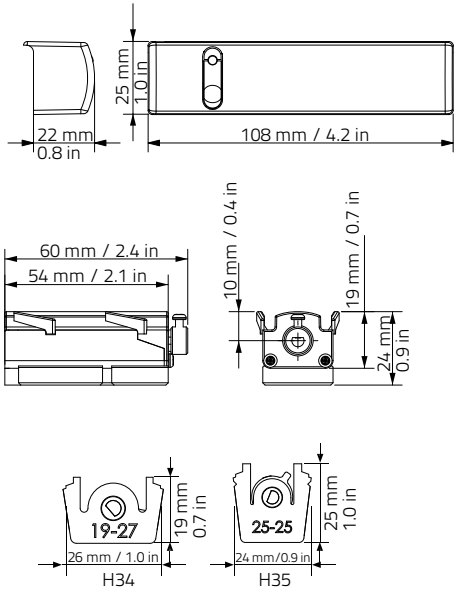

PARTSLIST ABC-02

MOTOR TILT-ONLY 25MM	Pos	Code	Description	Inner Carton	Outer Carton	
	8	ABC-02-W	Venetian tilt motor 25 mm x 25 mm and 27 mm x 19 mm white	1 pcs/carton	160 pcs/carton	
	8	ABC-02-S	Venetian tilt motor 25 mm x 25 mm and 27 mm x 19 mm silver	1 pcs/carton	160 pcs/carton	
	/	H35	Tilt stopper mechanical 25 mm x 25 mm	50 pcs/bag	250 pcs/carton	
	/	H34	Tilt stopper mechanical 27 mm x 19 mm	50 pcs/bag	250 pcs/carton	

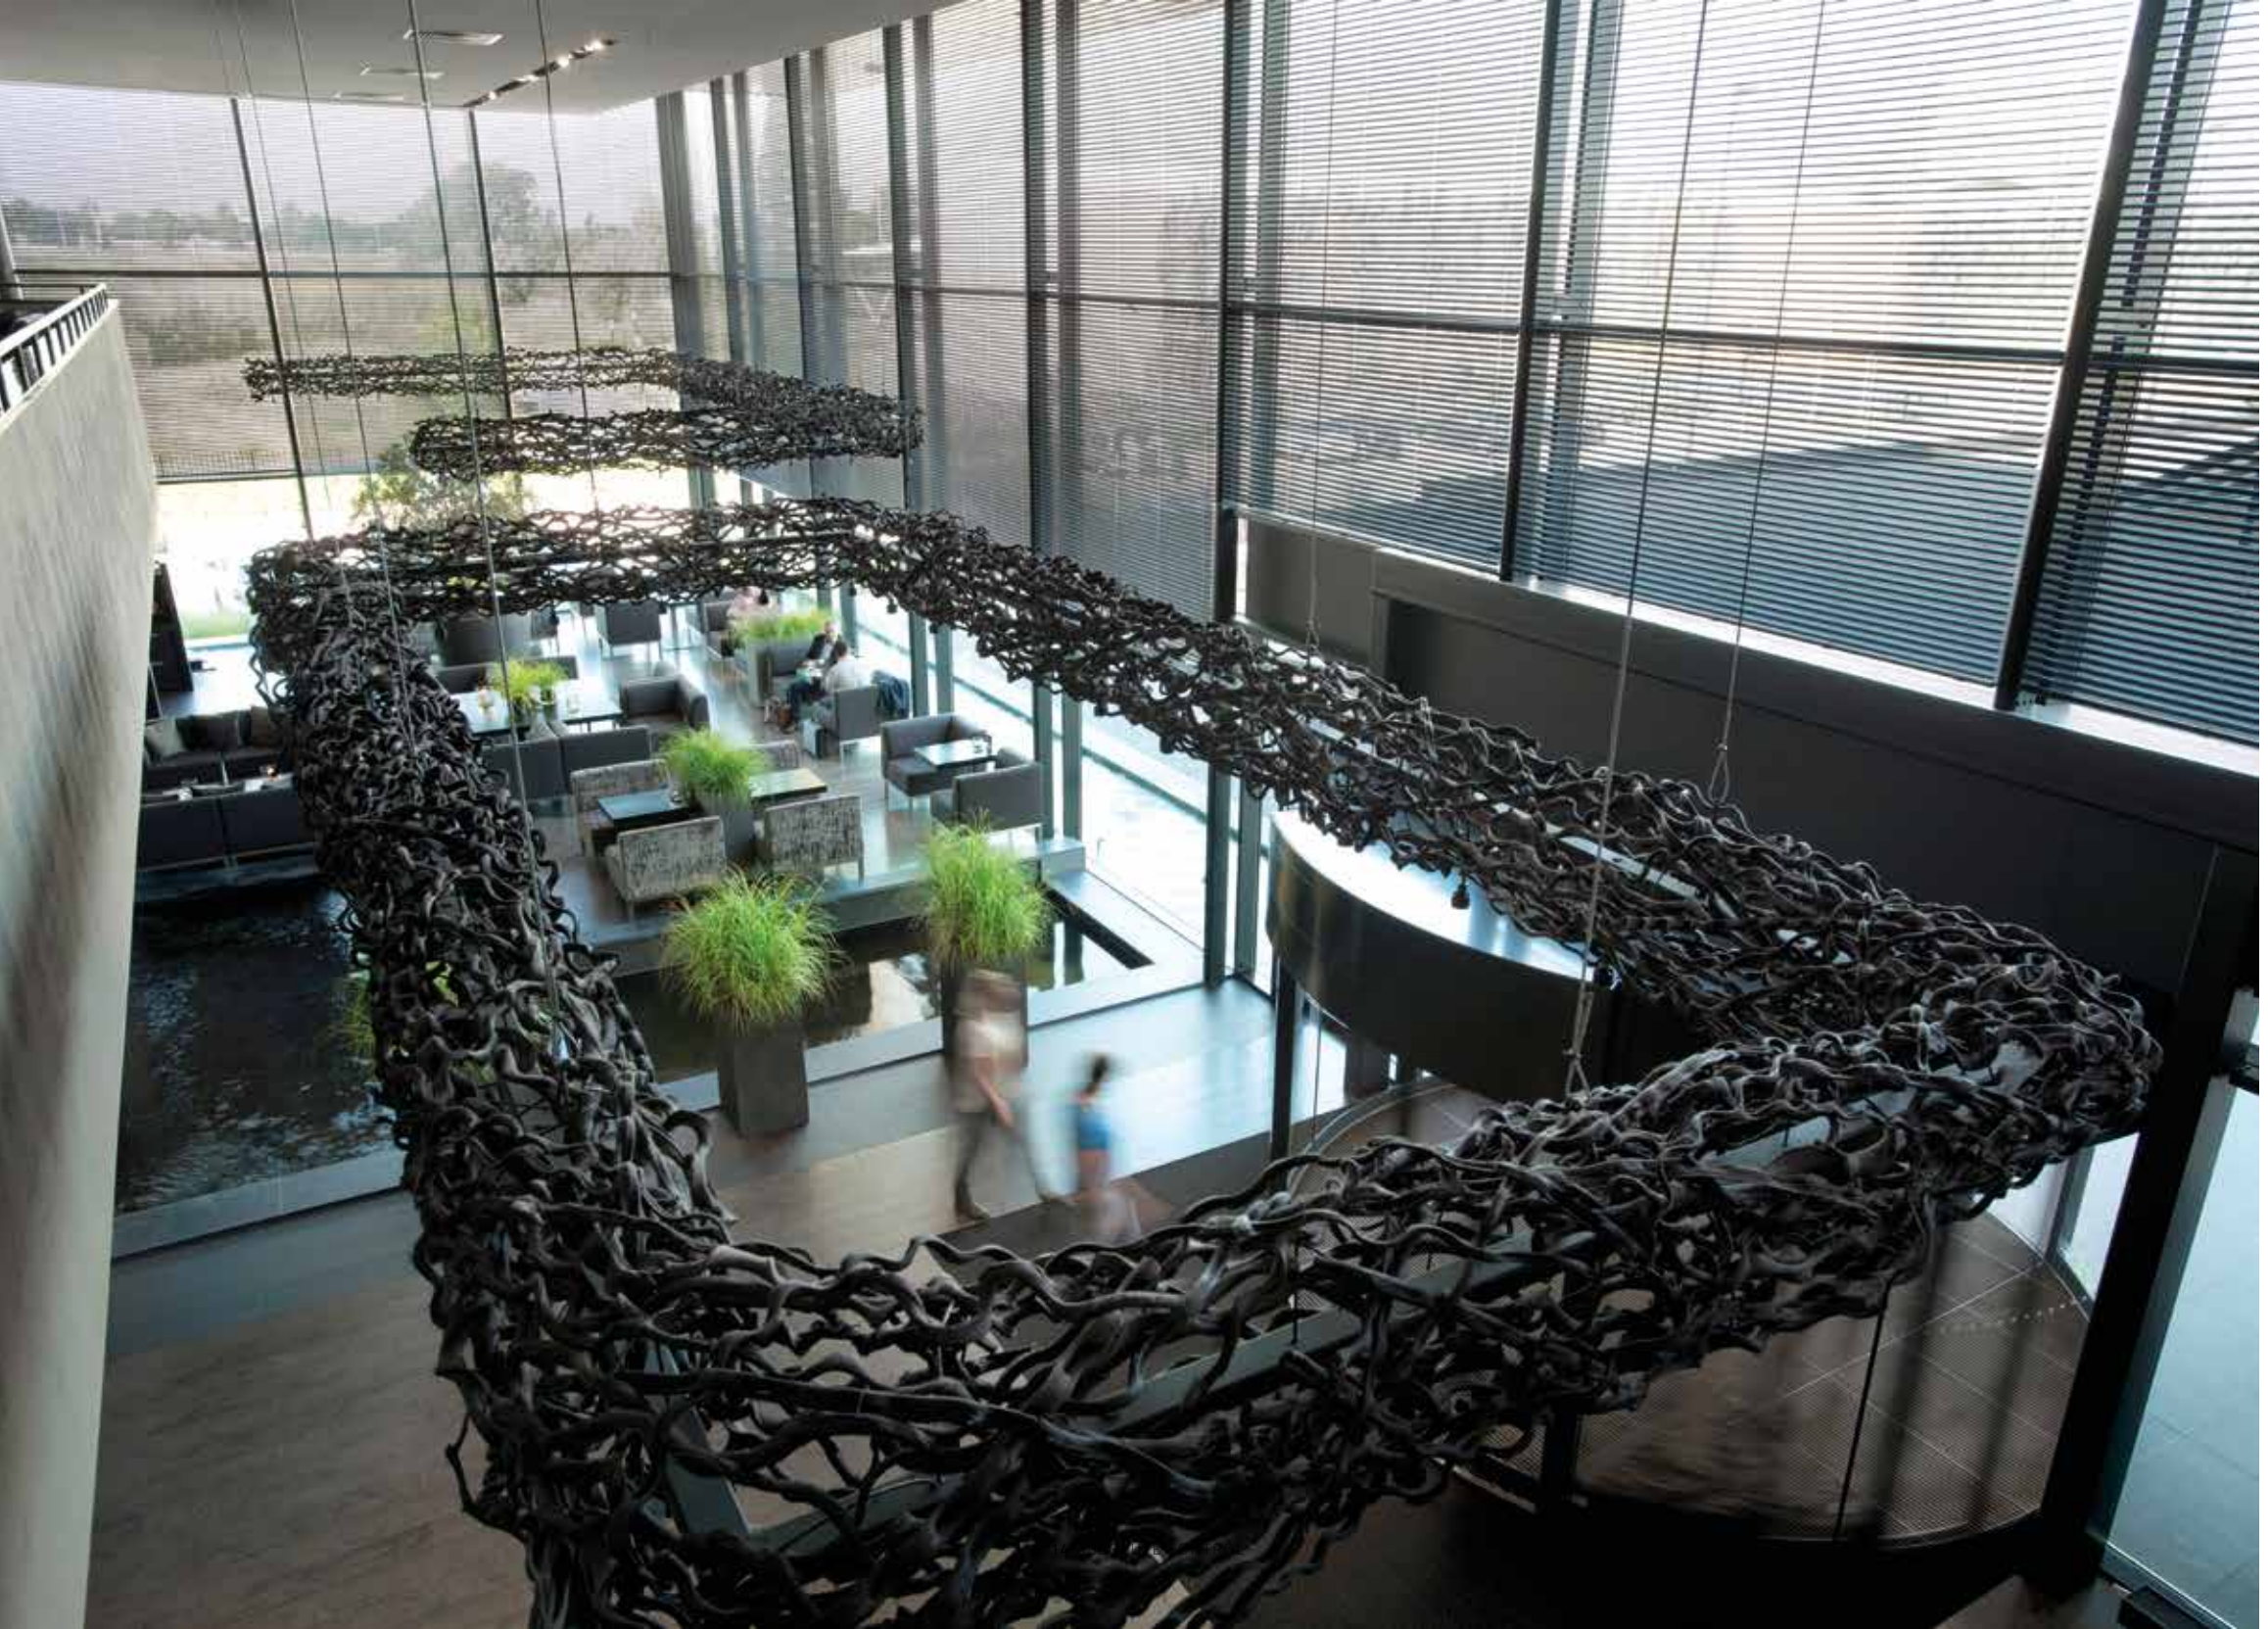

ABC-18

tilt-only motor 35-50 mm




- Compatible with 3 head rail sizes
- Motor is installed in the middle (patented technology); perfect for cut-down
- Easy installation
- Power supply options: battery, rechargeable battery tube or transformer
- RF module integrated into the motor
- Speed control
- Voltage range of in between 12 - 24V DC
- Programming end positions with remote control (no extra mechanical parts needed)




SPECIFICATIONS

Power supply	12 - 24 V DC - 0,3 A	
Rated power	3 W	
Torque	0,65 Nm	5.75 in - lb
Max. weight blind	12 kg	26.5 lb
Operating temperature	5 - 60°C	41 - 140°F
Max. channels to pair	32	
Weight	135 g	4.75 oz
Radio frequency	2.4 Ghz (bi-directional)	
Suitable for home automation	Yes	
Product certificate	CE FC	
Head rail size	51 x 57 mm 38 x 57 mm 38 x 38 mm	2,0 in x 2,2 in 1,5 in x 2,2 in 1,5 in x 1,5 in
Tilt-rod size	□ 5-6 mm ⬡ 6 mm	□ 0.20 in - 0.24 in ⬡ 0.24 in

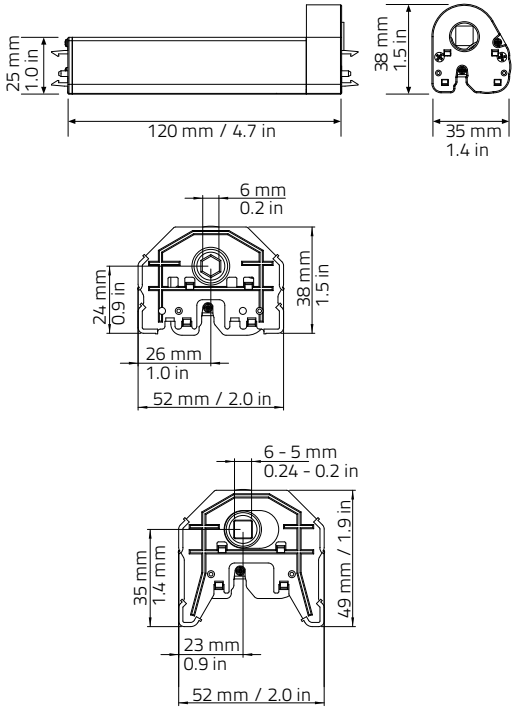


PARTSLIST ABC-18

MOTOR	Pos	Code	Description	Inner Carton	Outer Carton	
	8	ABC-18	Venetian 35 - 50 mm tilt-only	1 pcs/carton	90 pcs/carton	



ABC-17

middle motor




- Easy installation
- Power supply options: battery, rechargeable battery tube or transformer
- RF module integrated into the motor
- Speed control
- Voltage range of in between 12 - 24VDC
- Programming end positions with remote control (no extra mechanical parts needed)




Here displayed: application in roman blind

SPECIFICATIONS

Power supply	12 - 24 V DC - 0,6 A	
Rated power	7 W	
Torque	0,65 Nm	5.75 in - lb
Max. weight blind	4.0 kg	8.8 lb
Speed	39 rpm	5.5 lb
Operating temperature	5 - 60°C	41 - 140°F
Max. channels to pair	32	
Weight	200 g	7 oz
Radio frequency	2.4 Ghz (bi-directional)	
Suitable for home automation	Yes	
Product certificate	CE FC	
Head rails	Absolute Roman Roman Venetian 25 x 25 mm Pleated 20 - 25 mm	
Size tilt-rod	5 mm 5-6 mm 6 mm 0.20 in 0.20 in-0.24 in 0.24 in	

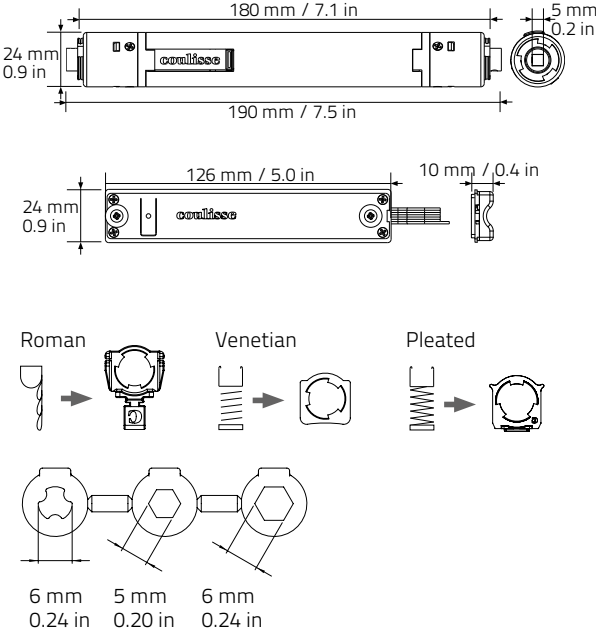

PARTSLIST ABC-17

MIDDLE MOTOR	Pos	Code	Description	Inner Carton	Outer Carton	
	5	ABC-17	Middle motor	1 pcs/carton	70 pcs/carton	
	/	RSC19	Clip battery tube white	400 pcs/bag	2000 pcs/carton	



ABC-04-LW


panel blind motor



- Unique in the market
- Compatible with Coulisse Absolute Panel Blind system
- Suitable for configurations split-draw left and right
- Power supply options: battery, rechargeable battery tube or transformer
- RF module integrated into the motor
- Patented driving technique
- Speed control
- Intelligent motor: self-learning, safety check, auto reset
- Voltage range of in between 12 - 24VDC
- Silent operation

SPECIFICATIONS



Power supply	12 - 24 V DC - 0,6 A	
Rated power	7 W	
Chain speed	3,75 m/min	12.3 ft/min
Chain pulling force	30 N	6.6 lb
Max. weight panel blind	15 kg	33 lb
Operating temperature	5 - 60°C	41 - 140°F
Max. channels to pair	32	
Weight	220 g	7.8 oz
Radio frequency	2.4 Ghz (bi-directional)	
Number of tracks	3, 4, 5	
Suitable for home automation	Yes	
Product certificate	CE FC	

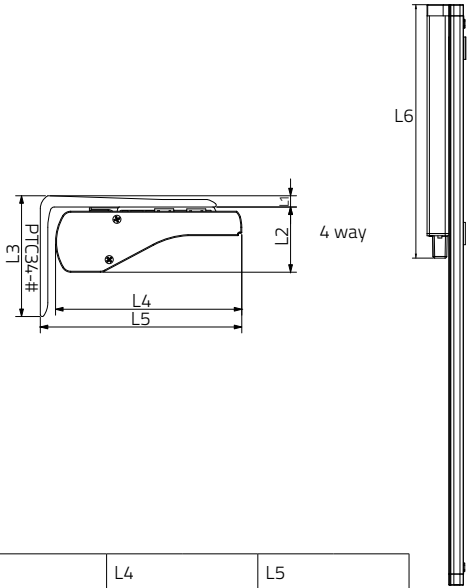

	L1	L2	L3	L6
Dimension				
mm	6	35	64	227
in	0.2	1.4	2.5	8.9

	L4		L5	
	mm	in	mm	in
3 -way	82	3.2	108	4.2
4 -way	99	3.9	108	4.2
5 -way	116	4.6	126	4.9
6 -way	134	5.2	144	5.6

PARTSLIST ABC-04-LW

PANEL BLIND MOTOR	Pos	Code	Description	Inner Carton	Outer Carton	
	6	ABC-04-LW	Panel blind motor left white	1 pcs/carton	30 pcs/carton	
	/	VC14-P	Pulling chain white	250 m/carton	2000 m/carton	
	/	PTC34	Wall bracket large white	50 pcs/bag	500 pcs/carton	



ABC-03-LW



vertical blind motor




- Unique in the market
- Compatible with Coulisse Absolute Vertical Blind system (no special components required)
- Easy assembly
- Suitable for configurations split-draw left and right and for different types of runners
- RF module integrated into the motor
- Patented driving technique
- Intelligent motor: self-learning, safety check, auto reset, speed control
- Vertical blind tilts completely to the right as well as to the left
- Power supply options: battery, rechargeable battery tube or transformer
- Voltage range of in between 12 - 24VDC
- Silent operation

SPECIFICATIONS

Power supply	12 - 24 V DC - 1,5 A	
Rated power	36 W	
Chain speed	4 m/min	13.1 ft/min
Chain pulling force	26 N	5.7 lb
Max. tilting torque	680 mNm	6 in - lb
Max. weight vertical blind	25 kg	55 lb
Operating temperature	5 - 60°C	41 - 140°F
Max. channels to pair	32	
Weight	420 g	14.8 oz
Radio frequency	2.4 Ghz (bi-directional)	
Suitable for home automation	Yes	
Product certificate	CE FC	



PARTSLIST ABC-03-LW

VERTICAL BLIND MOTOR	Pos	Code	Description	Inner Carton	Outer Carton	
	7	ABC-03-LW	Vertical motor left white	1 pcs/carton	30 pcs/carton	
	/	VC02-ABC-HLW	Window cleaner hook for ABC-03 white	100 pcs/bag	1000 pcs/carton	
	/	VC14-P	Pulling chain white	250 m/carton	2000 m/carton	
	/	VC07-SD-ABC	Center split clamp	10 pcs/bag	150 pcs/carton	



ABC-05

tubular motor




- Compatible with Coulisse Absolute Roller Blind
- Easy installation
- Power supply options: battery, rechargeable battery tube or transformer
- RF module integrated into the motor
- Speed control
- Voltage range of in between 12 - 24VDC
- Programming end positions with remote control
- Silent operation



SPECIFICATIONS

Power supply	12 - 24 V DC - 0,6 A
Rated power	7 W
Torque	0,6 Nm5.3 in - lb
Speed	28 rpm
Operating temperature	5 - 60°C41 - 140°F
Max. channels to pair	32
Weight	170 g6 oz
Radio frequency	2.4 Ghz (bi-directional)
Suitable for home automation	Yes
Product certificate	CEFC
Tubes	28 mm, 30 mm, 35 mm1.1 in, 1.2 in, 1.4 in

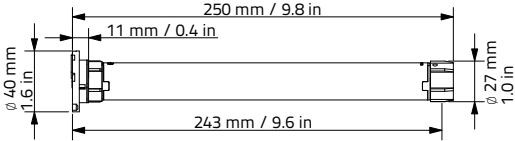


PARTSLIST ABC-05

	Pos	Code	Description	Inner Carton	Outer Carton	
TUBULAR MOTOR	4	ABC-05	Tubular motor 12 - 24V DC	1 pcs/carton	50 pcs/carton	
	/	RC2043	Roller blind motor adapter plastic black	100 pcs/bag	2000 pcs/carton	
USA TUBES	/	RCU-66	Tube adaptor 1,5 black	500 pcs/carton	500 pcs/carton	
	/	RCU-67-ABC05	Drive plug 1,5 adaptor for ABC-05 black	500 pcs/carton	500 pcs/carton	

AC MOTORS

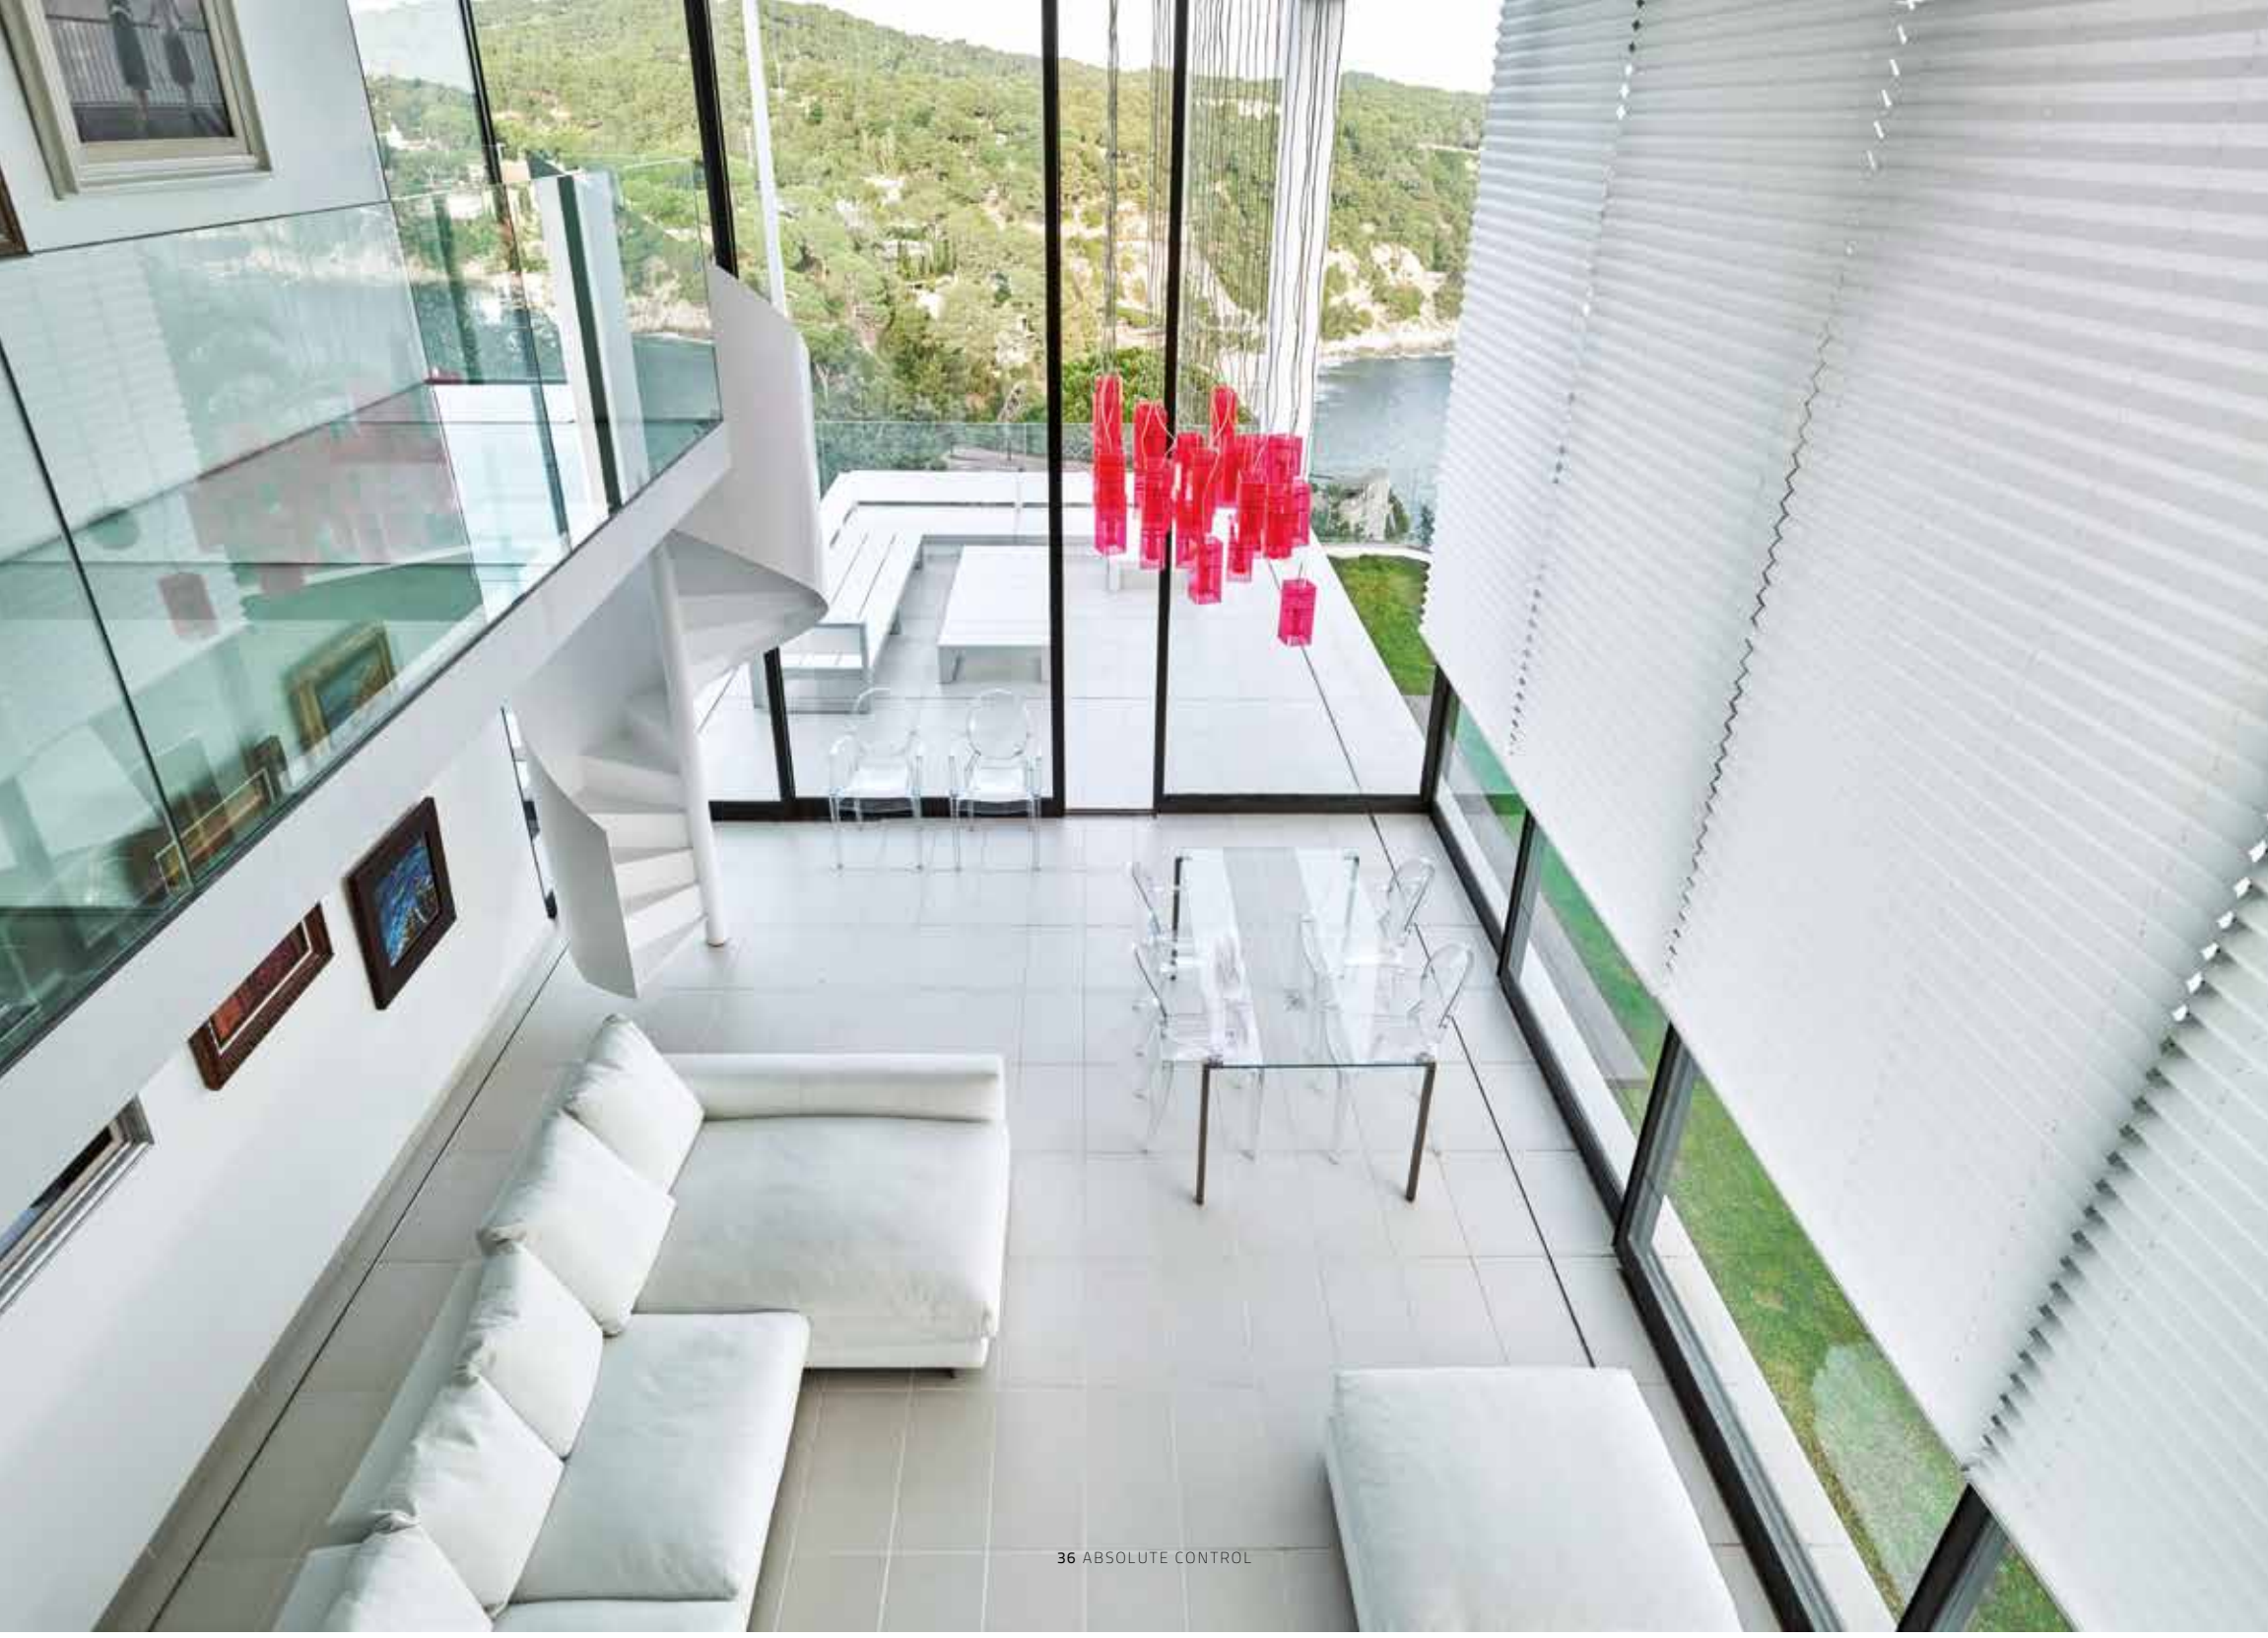
specifications





ABC-06

tubular motor




- Easy installation
- Silent operation
- Electronic version compatible with Coulisserie Absolute Roller Blind, XL Pleat and Absolute Roman Blind
- RF module integrated into motor (electronic version)
- Especially designed for internal use



Here displayed: application in roller blind

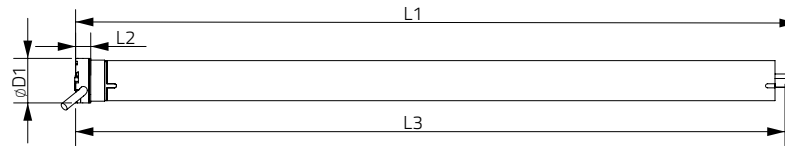SPECIFICATIONS ABC-06



Type	L1		L2		L3		D1		min. blind width	
	mm	in	mm	in	mm	in	mm	in	mm	in
Electronic	585	23,0	16	0,6	575	22,6	37	1,5	660	26
Mechanical	475	18.7	17	0.7	465	18.3	37	1.5	550	21.7
Mechanical Silent	550	21.6	17	0.7	540	21.2	37	1.5	630	24.8




GENERAL SPECIFICATIONS




230 V	ABC-06-MC		ABC-06-QMC		ABC-06-C		ABC-06-QC	
	mechanical		mechanical silent		electronic		electronic silent	
Power supply	230 V / 50 Hz		230 V / 50 Hz		230 V / 50 Hz		230 V / 50 Hz	
Rated current	0,53 A		0,57 A		0,62 A		0,57 A	
Rated power	121 W		133 W		144 W		133 W	
Torque	6 Nm	53 in - lb	4 Nm	35 in - lb	6 Nm	53 in - lb	4 Nm	35 in - lb
Speed	28 rpm		28 rpm		28 rpm		28 rpm	
Operating temp.	5 - 60°C	41 - 140°F	5 - 60°C	41 - 140°F	5 - 60°C	41 - 140°F	5 - 60°C	41 - 140°F
Operating time	4 min		4 min		4 min		4 min	
Max. channels to pair	/		/		32		32	
Max. no. of rotations	30		30		no limit		no limit	
Weight	1350 g	47 oz	1350 g	47 oz	1440 g	50 oz	1440 g	50 oz
Radio frequency	/		/		2.4 Ghz (bi-direct.)		2.4 Ghz (bi-direct.)	
Suitable for domotica	Yes		Yes		Yes		Yes	
Cable lenght	2 m	6.5 ft	2 m	6.5 ft	2 m	6.5 ft	2 m	6.5 ft
Degree of protection	IP 44		IP 44		IP 44		IP 44	
Product certificate	△ CE		△ CE		△ CE		△ CE	



SPECIFICATIONS ABC-06

GENERAL SPECIFICATIONS

120 V	ABC-06-MC120	ABC-06-QMC120	ABC-06-C120	ABC-06-QC120
	mechanical	mechanical silent	electronic	electronic silent
Power supply	120 V / 60 Hz	120 V / 60 Hz	120 V / 60 Hz	120 V / 60 Hz
Rated current	0,85 A	0,85 A	0,85 A	0,85 A
Rated power	102 W	102 W	102 W	102 W
Torque	6 Nm 53 in - lb	4 Nm 35 in - lb	6 Nm 53 in - lb	4 Nm 35 in - lb
Speed	33 rpm	33 rpm	33 rpm	33 rpm
Operating temp.	5 - 60°C 41 - 140°F	5 - 60°C 41 - 140°F	5 - 60°C 41 - 140°F	5 - 60°C 41 - 140°F
Operating time	4 min	4 min	4 min	4 min
Max. channels to pair	/	/	32	32
Max. no. of rotations	30	30	no limit	no limit
Weight	1350 g 47 oz	1350 g 47 oz	1440 g 50 oz	1440 g 50 oz
Radio frequency	/	/	2.4 Ghz (bi-direct.)	2.4 Ghz (bi-direct.)
Suitable for domotica	Yes	Yes	Yes	Yes
Cable lenght	2 m 6.5 ft	2 m 6.5 ft	2 m 6.5 ft	2 m 6.5 ft
Degree of protection	IP 44	IP 44	IP 44	IP 44
Product certificate				

TUBULAR MOTOR	Pos	Code	Description	Inner Carton	Outer Carton	
	4	ABC-06-C	Tubular motor 6Nm 28rpm 230V AC 40 mm	1 pcs/carton	6 pcs/carton	
	4	ABC-06-QC	Tubular motor silent 4Nm 28rpm 230V AC 40 mm	1 pcs/carton	6 pcs/carton	
	4	ABC-06-MC	Tubular motor mechanical 6Nm 28rpm 230V AC 40 mm	1 pcs/carton	6 pcs/carton	
	4	ABC-06-QMC	Tubular motor mech. silent 4Nm 33rpm 230V AC 40mm	1 pcs/carton	6 pcs/carton	
	4	ABC-06-C120	Tubular motor 6Nm 33rpm 120V AC 40 mm	1 pcs/carton	6 pcs/carton	
	4	ABC-06-QC120	Tubular motor silent 4Nm 33rpm 120V AC 40 mm	1 pcs/carton	6 pcs/carton	
	4	ABC-06-MC120	Tubular motor mechanical 6Nm 33rpm 120V AC 40 mm	1 pcs/carton	6 pcs/carton	
	/	RC3044	Roller blind AC motor adapter metal	1 pcs/carton	1 pcs/carton	


DRIVE PLUGS & ADAPTERS	Pos	Code	Description	Inner Carton	Outer Carton	
	/	RCU-29-ABC	Drive plug AC40 for 42 50 mm tube	12 pcs/bag	240 pcs/carton	
	/	RCU-30-ABC	Drive plug AC40 for 65 mm tube	12 pcs/bag	240 pcs/carton	
	/	RCU-31-ABC	Drive plug AC40 for 80 mm tube	12 pcs/bag	240 pcs/carton	
	/	RC3045-ABC	Drive plug Coulisse silent AC 42/50 mm	12 pcs/bag	192 pcs/carton	
	/	RC4023-ABC	Drive plug Coulisse silent AC 65 mm	12 pcs/bag	60 pcs/carton	
	/	RC4024-ABC	Drive plug Coulisse silent AC 80 mm	12 pcs/bag	60 pcs/carton	
	/	RCU-13	Tube adapter 65 mm	24 set/bag	480 set/carton	
	/	RCU-14	Tube adapter 80 mm	24 set/bag	480 set/carton	

USA TUBES	Pos	Code	Description	Inner Carton	Outer Carton	
	/	ABC-15	Conversion kit for ABC-16	4 set/bag	64 set/carton	
	/	RCU-63-ABC	Drive plug for 2 inch tube	24 pcs/Bag	240 pcs/Bag	
	/	RCU-65-ABC	Drive plug for 2.5 inch tube	15 pcs/Bag	240 pcs/Bag	
	/	RCU-62	Tube adapter 2 inch tube USA	16 pcs/bag	480 pcs/carton	
	/	RCU-64	Tube adapter 2.5 inch tube USA	12 pcs/bag	240 pcs/carton	



ABC-07

tubular motor




- Easy installation and silent operation
- Recommended for heavy duty applications:
 - Roller blinds (electronic/MC)
 - XL Pleat (only electronic version)
 - Absolute Roman Blind (only electronic version)
- Compatible with Absolute Roller Blind, Venetian Blind, XL Pleat and Absolute Roman Blind
- RF module integrated into motor (electronic version)



Here displayed: application in Venetian blinds

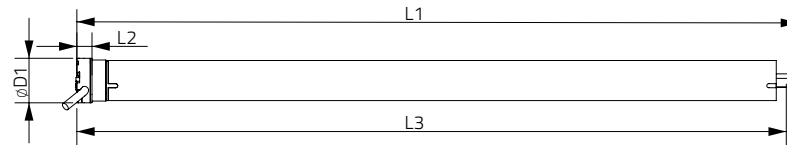SPECIFICATIONS ABC-07





Type	L1		L2		L3		D1		Min. blind size	
	mm	in	mm	in	mm	in	mm	in	mm	in
Electronic	585	23.0	16	0.6	575	22.6	37	1.5	680	26.8
Mechanical Silent	550	21.6	17	0.7	540	21.2	37	1.5	630	24.8




SPECIFICATIONS





	230 V				120 V			
	ABC-07-QMC		ABC-07-QC		ABC-07-QMC120		ABC-07-QC120	
	mechanical silent		electronic silent		mechanical silent		electronic silent	
Power supply	230 V / 50 Hz		230 V / 50 Hz		120 V / 60 Hz		120 V / 60 Hz	
Rated current	0,57 A		0,57 A		0,85 A		0,85 A	
Rated power	133 W		133 W		102 W		102 W	
Torque	8 Nm	70 in - lb	8 Nm	70 in - lb	8 Nm	70 in - lb	8 Nm	70 in - lb
Speed	15 rpm		15 rpm		17 rpm		17 rpm	
Operating temp.	5 - 60°C	41 - 140°F	5 - 60°C	41 - 140°F	5 - 60°C	41 - 140°F	5 - 60°C	41 - 140°F
Operating time	4 min		4 min		4 min		4 min	
Max. channels to pair	/		32		/		32	
Max. no. of rotations	30		no limit		30		no limit	
Weight	1350 g	47 oz	1440 g	50 oz	1350 g	47 oz	1440 g	50 oz
Radio frequency	/		2.4 Ghz (bi-direct.)		/		2.4 Ghz (bi-direct.)	
Suitable for domotica	Yes		Yes		Yes		Yes	
Cable lenght	2 m	6.5 ft	2 m	6.5 ft	2 m	6.5 ft	2 m	6.5 ft
Degree of protection	IP 44		IP 44		IP 44		IP 44	
Product certificate	CE		CE		UL		UL US FC	

PARTSLIST ABC-07

Pos	Code	Description	Inner Carton	Outer Carton	
4	ABC-07-QC	Tubular motor silent 8Nm 15rpm 230V AC 40 mm	1 pcs/carton	6 pcs/carton	
4	ABC-07-MC	Tubular motor mechanical 10Nm 15rpm 230V AC 40 mm	1 pcs/carton	6 pcs/carton	
4	ABC-07-QMC	Tubular motor mechan. silent 8Nm 15rpm 230V AC 40 mm	1 pcs/carton	6 pcs/carton	
4	ABC-07-QC120	Tubular motor silent 8Nm 17rpm 120V AC 40 mm	1 pcs/carton	6 pcs/carton	
4	ABC-07-QMC120	Tubular motor mechan. silent 8Nm 17rpm 120V AC 40 mm	1 pcs/carton	6 pcs/carton	
/	RC3044	Roller blind AC motor adapter metal	25 pcs/bag	500 pcs/carton	

TUBULAR MOTOR

DRIVE PLUGS & ADAPTERS	Pos	Code	Description	Inner Carton	Outer Carton	
	/	RCU-29-ABC	Drive plug AC40 for 42 50 mm tube	12 pcs/bag	240 pcs/carton	
	/	RCU-30-ABC	Drive plug AC40 for 65 mm tube	12 pcs/bag	240 pcs/carton	
	/	RCU-31-ABC	Drive plug AC40 for 80 mm tube	12 pcs/bag	240 pcs/carton	
	/	RC3045-ABC	Drive plug Coulisse silent AC 42 / 50 mm	12 pcs/bag	192 pcs/carton	
	/	RC4023-ABC	Drive plug Coulisse silent AC 65 mm	12 pcs/bag	60 pcs/carton	
	/	RC4024-ABC	Drive plug Coulisse silent AC 80 mm	12 pcs/bag	6 pcs/carton	
	/	RCU-13	Tube adapter 65 mm	24 set/bag	480 set/carton	
	/	RCU-14	Tube adapter 80 mm	24 set/bag	480 set/carton	

OCTAGONAL TUBE	Pos	Code	Description	Inner Carton	Outer Carton	
	/	ABC-15	Conversion kit for ABC-16	4 set/bag	64 set/carton	
USA TUBES	/	RCU-63-ABC	Drive plug for 2 inch tube	24 pcs/Bag	240 pcs/Bag	
	/	RCU-65-ABC	Drive plug for 2.5 inch tube	15 pcs/Bag	240 pcs/Bag	
	/	RCU-62	Tube adapter 2 inch tube USA	16 pcs/bag	480 pcs/carton	
	/	RCU-64	Tube adapter 2.5 inch tube USA	12 pcs/bag	240 pcs/carton	



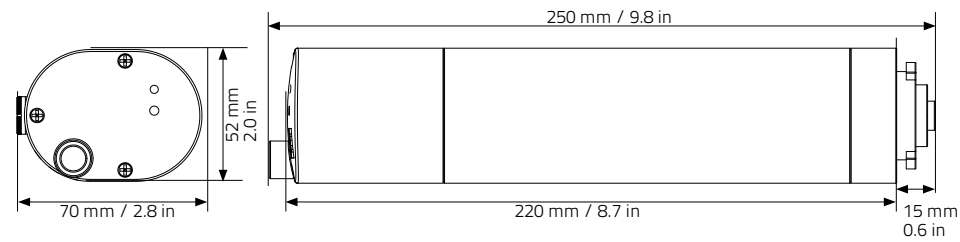
ABC-23

curtain motor



- Allows for combining the operation of blinds and curtains in one
- Easy installation
- Silent operation
- RF module integrated into motor (electronic version)






SPECIFICATIONS ABC-23




SPECIFICATIONS

	230 V		120 V	
	ABC-23-W		ABC-23-W120	
	electronic silent		electronic silent	
Power supply	230 V / 50 Hz		120 V / 60 Hz	
Rated current	0,23 A		0,48 A	
Rated power	45 W		55 W	
Torque	0,8 Nm	7 in - lb	0,8 Nm	7 in - lb
Speed	20 cm/s	7.9 in/s	24 cm/s	9.4 in/s
Max. weight vertical blind	50 kg	110 lb	50 kg	110 lb
Operating temperature	5 - 60°C	41 - 140°F	5 - 60°C	41 - 140°F
Operating time	4 min		4 min	
Max. channels to pair	32		32	
Max. number of rotations	no limit		no limit	
Weight	1150 g	41 oz	1150 g	41 oz
Radio frequency	2.4 Ghz (bi-directional)		2.4 Ghz (bi-directional)	
Suitable for home automation	Yes		Yes	
Cable lenght	2 m	6.5 ft	2 m	6.5 ft
Degree of protection	IP 20		IP 20	
Product certificate				

PARTSLIST ABC-23

CURTAIN MOTOR	Pos	Code	Description	Inner Carton	Outer Carton	
	9	ABC-23-W	Curtain motor 230V AC white	1 pcs/carton	10 pcs/carton	
	9	ABC-23-W120	Curtain motor 120V AC white	1 pcs/carton	10 pcs/carton	
	/	CR-01-W	Rail 580 cm white	69,6 m/carton	69,6 m/carton	
	/	CR-02	Drive belt	100 m/carton	400 m/carton	
	/	CR-03	Drive runner	10 pcs/carton	100 pcs/carton	
	/	CR-04-W	End cap white	5 pcs/bag	200 pcs/carton	
	/	CR-05-W	End cap cover white	50 pcs/bag	200 pcs/carton	
	/	CR-06-W	Ceiling bracket white	200 pcs/carton	400 pcs/carton	

CURTAIN MOTOR	Pos	Code	Description	Inner Carton	Outer Carton	
	/	CR-07-W	Wall bracket single white	100 pcs/carton	200 pcs/carton	
	/	CR-08-W	Wall bracket double white	100 pcs/carton	200 pcs/carton	
	/	CR-09	End cap connector with eyelet	100 pcs/bag	4000 pcs/carton	
	/	CR-10	End cap connector without eyelet	100 pcs/bag	4000 pcs/carton	
	/	CR-11-W	Runner white	200 pcs/bag	4000 pcs/carton	
	/	CR-12	Drive belt connector	500 pcs/bag	4000 pcs/carton	
	/	CR-13-W	End hook white	100 pcs/bag	4000 pcs/carton	
	/	CR-14-W	Rail connector white	10 pcs/bag	50 pcs/carton	

CONTROLS

specifications



ABC-01

five channel remote control



- Easy to operate
- Operates all Coulisse motors
- Aesthetical design
- Wall holder included
- Available in different colors

ABC-20

single channel remote control



- Easy to operate
- Operates all Coulisse motors
- Aesthetical design
- Wall holder included

ABC-26

wall switch

NEW



- Wireless wall switch (location of installation without restrictions)
- Simple operation of blinds (ideal for contract market and hospitality market)
- Plug and play

ABC-19

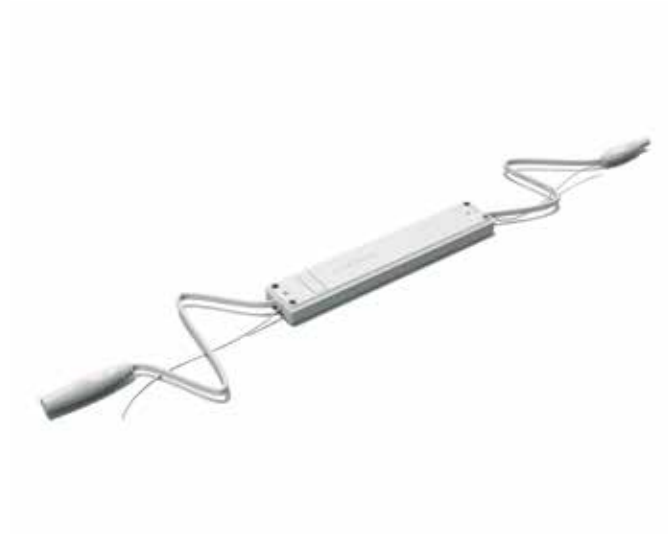
domotica box



- Compatible with all common home automation systems
- Stand-alone: wall switch or LCD touch screen
- Operation options: Domotica box or manually with remote control
- Can be programmed separately from home automation system
- Easy to program
- Eight different scenario's can be programmed
- Control through RS232 or dry-contact

ABC-22


transfer box



- Allows for Coulisse motors to be operated with Somfy remote controls and control systems
- Allows for Coulisse controls to operate Somfy motors
- Transfer box can be operated with Coulisse and Somfy
- Easy to install on Coulisse motors (plug and play)


SPECIFICATIONS

Power supply	CR2032 1.5 V	
Channels	5	
Max. number of blinds per channel	infinite	
Range (inside building)	30 m 100 ft (2 concrete walls)	
Radio frequency	2.4 GHz (bi-directional)	
Operating temperature	5 - 60°C	41 - 140°F
Weight	56 g	2 oz
Single select	Yes	
Product certificate	CE FC	

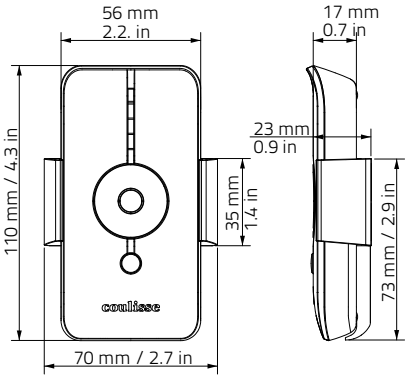


SPECIFICATIONS

Power supply	CR2032 1.5V	
Channels	1	
Max. number of blinds per channel	infinite	
Range (inside building)	30 m 100 ft (2 concrete walls)	
Radio frequency	2.4 GHz (bi-directional)	
Operating temperature	5 - 60°C	41 - 140°F
Weight	56 g	2 oz
Single select	No	
Product certificate	CE FC	

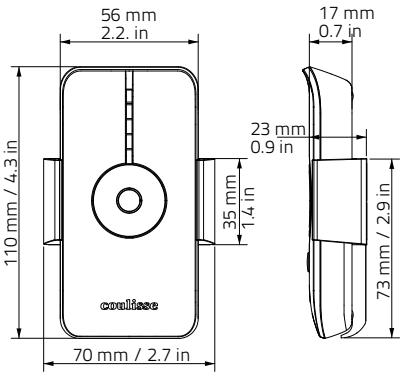

SPECIFICATIONS


Power supply	CR2430 3.0 V	
Channels	1	
Max. number of blinds per channel	infinite	
Range (inside building)	30 m 100 ft (2 concrete walls)	
Radio frequency	2.4 GHz (bi-directional)	
Operating temperature	5 - 60°C	41 - 140°F
Weight	40 g	1.29 oz
Single select	Yes	
Product certificate	CE FC	

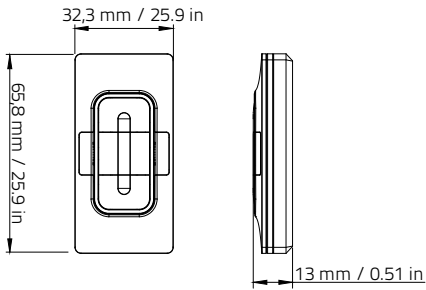

Compatible with Lutron wall plate

SPECIFICATIONS

Power supply	12 - 24 V DC
Operating temperature	5 - 60°C 41 - 140°F
Number of scenarios	8
Weight	200 g 7 oz
Radio frequency	2.4 GHz (bi-directional)
Range (inside building)	30 m 100 ft (2 concrete walls)
Input	Dry contacts or RS232
Product certificate	CE

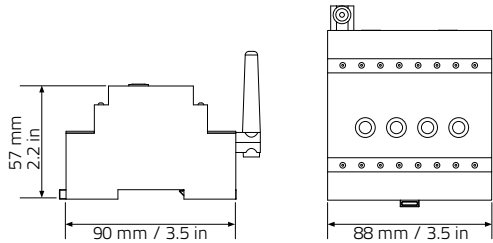


COMPATIBILITY





ABC-03-LW
ABC-04-LW
ABC-05
ABC-17
ABC-18
ABC-06-C
ABC-06-C120
ABC-06-QC
ABC-06-QC120
ABC-07-QC
ABC-07-QC120
ABC-23-W
ABC-23-W120

SPECIFICATIONS

Power supply	12 - 24 V DC	
Operating temperature	5 - 60°C	41 - 140°F
Weight	35 g	1.2 oz
Radio frequency	2.4 GHz (bi-directional) and 433 Mhz	
Range (inside building)	30 m 100 ft (2 concrete walls)	
Compatibility	2,4 Ghz <=> 433 Mhz	
Product certificate	CE	
Max. channels to pair Coulisse 2,4 Ghz > 433 Mhz	32 channels	
Max. channels to pair 433 Mhz > 2,4 Ghz	Up & down unlimited left and right converting max 32 channels	



PARTSLIST CONTROLS

CONTROLS	Pos	Code	Description	Inner Carton	Outer Carton	
	10	ABC-01-W	Remote made to measure inclusive holder white	1 set/carton	80 set/carton	
	10	ABC-01-S	Remote made to measure inclusive holder silver	1 set/carton	80 set/carton	
	10	ABC-20-W	One-channel remote control white	1 set/carton	80 set/carton	
	11	ABC-26-W	Wall switch RF white	pcs/carton	1 pcs/carton	
	12	ABC-19	Domotica box	1 pcs/carton	1 pcs/carton	
	/	ABC-22	Transfer box 12 - 24V DC	1 pcs/carton	20 pcs/carton	

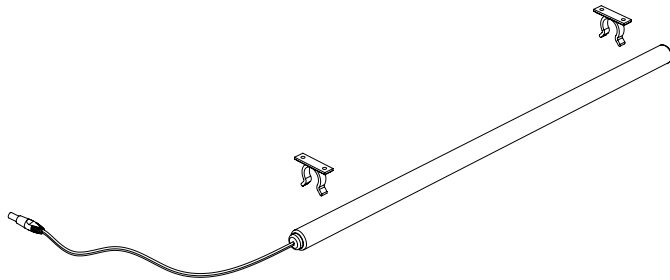
POWER SUPPLIES

specifications



ABC-13

battery tube




- Works with normal batteries
- One battery tube for all DC motors
- Easy to install with plastic brackets

ABC-24

rechargeable battery tube

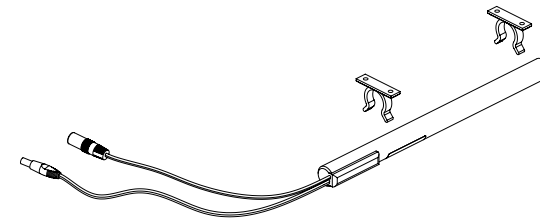
NEW



- Average recharge frequency once a year
- Compact design
- Easy installation
- Charger: ABC-25

ABC-11

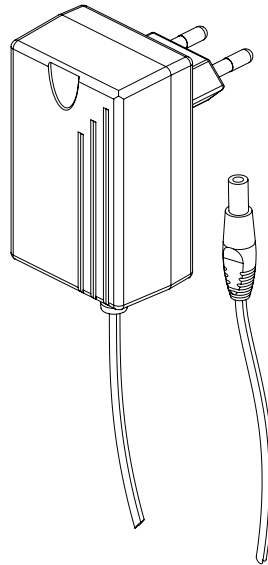
transformer



- One transformer for all DC motors
- Easy installation (plug and play)

ABC-10

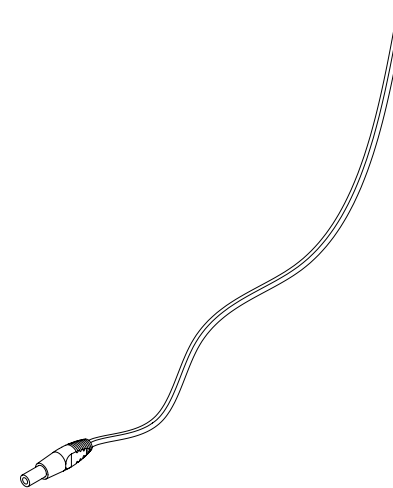
wire



- Easy extension short wires
- Plug and play

SPECIFICATIONS

Input	10 x AA 1.5 V alkaline
Output	15 V DC
Cable length	230 mm 9 in
Weight	150 g (without batteries) 5.3 oz
Application	power supply for all DC motors
Operating temperature	5 - 60°C 41 - 140°F

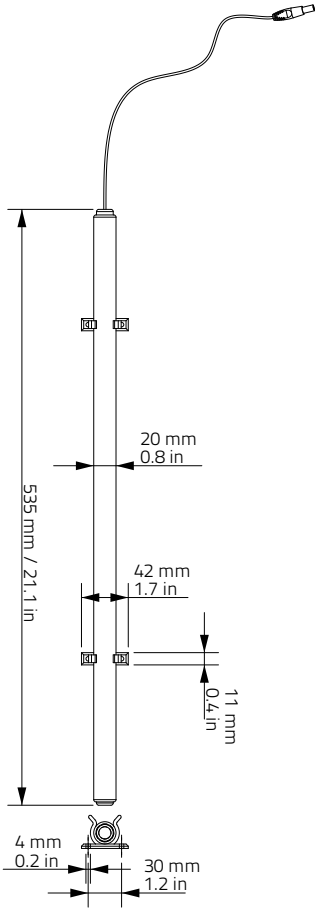


SPECIFICATIONS

Rating	14.8 V	
Cable length male / female	300 mm	11.81 in
Weight	200 g	6.45 oz
Application	power supply for all DC motors	
Operating temperature	5 - 60°C	41 - 140°F

SPECIFICATIONS ABC-25 CHARGER

Input	100 - 240 V 50 / 60 Hz 0.6 A
Output	16,8V --- 1,5A
Caution	For use with ABC-24 only

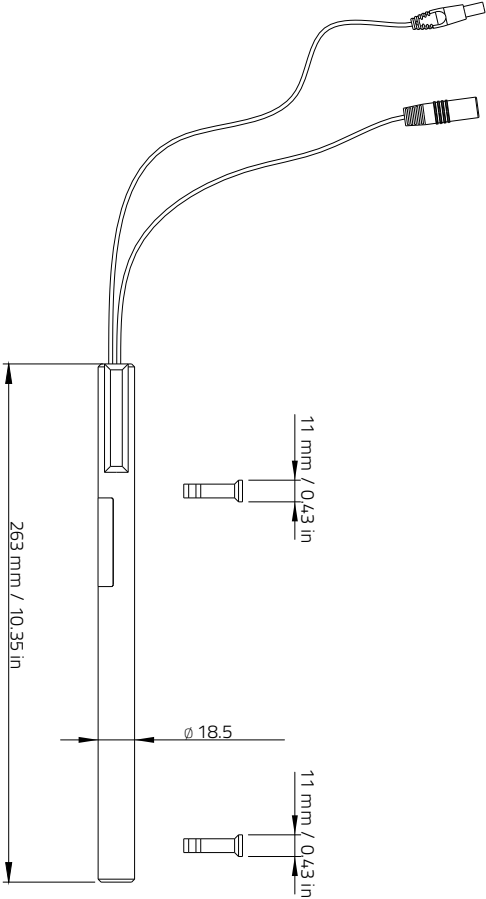



SPECIFICATIONS ABC-11 & 10

SPECIFICATIONS ABC 11

Input	100 - 240 V AC 50 - 60 Hz	
Output	24 V DC - 1,0 A	
Cable length	3,75 m	12.3 ft
Weight	270 g	9.5 oz
Application	power supply for all DC motors	
Operating temperature	5 - 60°C	41 - 140°F
Product certificate	CE c  us FC	

COMPATIBILITY





Europe continental	USA	UK
		

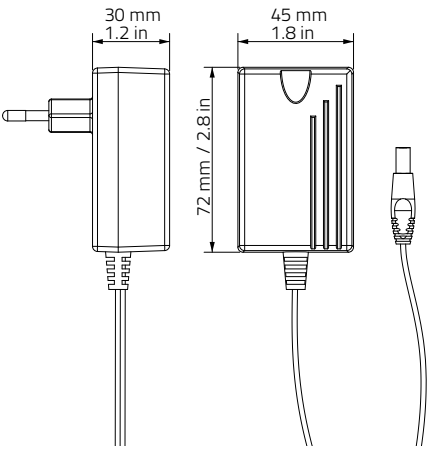

SPECIFICATIONS ABC 10

For power supply	12 - 24 V DC - max. 1,5 A	
Cable length	10 m	32.8 ft
Weight	240 g	8.5 oz
Application	Extention cable for 12 - 24 V DC adapters (incl. male and female connector)	

PARTSLIST POWER SUPPLIES

Pos	Code	Description	Inner Carton	Outer Carton	
1	ABC-13-W	Battery tube 10 batteries white	1 pcs/carton	100 pcs/carton	
2	ABC-24	Battery pack 14.8V, 2600 MaH white	1 pcs/carton	10 pcs/carton	
/	ABC-25	Battery charger 16.8V 1,5A, white	1 pcs/carton	10 pcs/carton	
3	ABC-11-W1	Adapter 1.0A - 24V DC 100V - 240V AC white	1 pcs/carton	50 pcs/carton	
3	ABC-11-W1-UK	Adapter 1.0A - 24V DC 100V - 240V AC UK white	1 pcs/carton	50 pcs/carton	
3	ABC-11-W-USA	Adapter 1.0A - 24V DC 100V - 240V AC USA white	1 pcs/carton	100 pcs/carton	
/	ABC-10-W	Power supply wire 12V DC incl. connector 10 m white	1 pcs/carton	50 pcs/carton	

POWER SUPPLIES

SELECTION TABLE & OVERVIEW



SELECTION TABLE

	Requirements								
Blind system	Max. width		Max. height (only applicable for mechanical limit switch)		Max. surface		Max. weight		
Roller blinds	m	in	m	in	m²	ft²	kg	lb	
	2,0	78.7	no limit	no limit	ca. 5	ca. 54	3,0	6.6	
	2,3	90.6	no limit	no limit	ca. 5	ca. 54	3,0	6.6	
	2,7	106.3	no limit	no limit	ca. 6	ca. 65	2,5	5.5	
	3,0	118.1	ca. 4,5	177.2	ca. 27*	ca. 291*	19,0	41.9	
	3,5	137.8	ca. 5,3	208.7	ca. 23*	ca. 248*	16,0	35.3	
	4,0	157.5	ca. 6,7	263.8	ca. 19*	ca. 205*	13,0	28.7	
	5,0	196.9	ca. 8,0	315.0	ca. 15	ca. 161	10,0	22.0	
	3,0	118.1	ca. 4,5	177.2	ca. 39*	ca. 420*	28,0	61.7	
	3,5	137.8	ca. 5,3	208.7	ca. 32*	ca. 344*	24,0	52.9	
	4,0	157.5	ca. 6,7	263.8	ca. 27*	ca. 291*	19,0	41.9	
	5,0	196.9	ca. 8,0	315.0	ca. 21	ca. 226	15,0	33.1	
	3,0	118.1	ca. 4,5	177.2	ca. 54*	ca. 581*	38,0	83.8	
	3,5	137.8	ca. 5,3	208.7	ca. 46*	ca. 495*	32,0	70.5	
	4,0	157.5	ca. 6,7	263.8	ca. 38*	ca. 409*	26,0	57.3	
	5,0	196.9	ca. 8,0	315.0	ca. 30*	ca. 323*	20,0	44.1	

* = only possible when using intermediate brackets

SELECTION TABLE

			Motor solution			
	Application		Motor		Type	Power supply options
	mm	in				
	Tube diameter (mm)		Art.no.:	ABC-05	RF + encoder	battery / rechargeable battery tube / transformer
	28	1.1	Description:	Tubular motor 12 - 24 VDC		
	30	1.2				
	35	1.4				
	Tube diameter (mm)		Art.no.:	ABC-06-QC or - QMC	RF + encoder or mechanical limit switch	mains
	42	1.7	Description:	Tubular motor 120 VAC - 230 VAC		
	50	2.0				
	65	2.6				
	80	3.1				
	Tube diameter (mm)		Art.no.:	ABC-06-C or - MC	RF + encoder or mechanical limit switch	mains
	42	1.7	Description:	Tubular motor 120 VAC - 230 VAC		
	50	2.0				
	65	2.6				
	80	3.1				
	Tube diameter (mm)		Art.no.:	ABC-07-QC or - QMC	RF + encoder or mechanical limit switch	mains
	42	1.7	Description:	Tubular motor 120 VAC - 230 VAC		
	50	2.0				
	65	2.6				
	80	3.1				

SELECTION TABLE

	Requirements								
Blind system	Max. width (m)		Max. height (meters) only applicable for mechanical limit switch		Max. surface (m²)		Max. weight (kg)		
Venetian blinds	m	in	m	in	m²	ft²	kg	lb	
	ca. 2,7	ca. 106.3	no limit	no limit	ca. 7	ca. 75	6,0	13.2	
	ca. 2,7	ca. 106.3	no limit	no limit	ca. 7	ca. 75	6,0	13.2	
	ca. 2,7	ca. 106.3	no limit	no limit	ca. 12	ca. 65	12,0	26.5	
	ca. 2,7	ca. 106.3	no limit	no limit	ca. 12	ca. 65	12,0	26.5	
	ca. 2,7	ca. 106.3	no limit	no limit	ca. 12	ca. 65	12,0	26.5	
	ca. 2,7	ca. 106.3	ca. 3,5	137,8	ca. 5	ca. 54	4,0	8,8	
	ca. 3,5	ca. 137.8	ca. 4,5* / 5,0	ca. 177.2* / 196.9	ca. 15	ca. 161	15,0	33.1	
Roman blinds									
	ca. 3,6	ca. 141.7	ca. 3,5	137.8	ca. 6	ca. 65	4,0	8.8	
	ca. 3,6	ca. 141.7	ca. 3,5	137.8	ca. 6	ca. 65	4,0	8.8	
	ca. 5,0	ca. 196.9	ca. 4,5* / 5,0	ca. 177.2* / 196.9	ca. 10	ca. 108	8,0	17.6	
	ca. 5,0	ca. 196.9	ca. 4,5* / 5,0	ca. 177.2* / 196.9	ca. 15	ca. 161	12,0	26.5	
	ca. 5,0	ca. 196.9	ca. 4,5* / 5,0	ca. 177.2* / 196.9	ca. 20	ca. 215	15,0	33.1	

SELECTION TABLE

			Motor solution			
	Application		Motor		Type	Power supply options
	mm	in				
	Head rail (mm) 25 x 25 19 x 27	1.0 x 1.0 0.7 x 1.1	Art.no.: Description:	ABC-02 Motor tilt-only 6 VDC 	RF	battery
	Head rail (mm) 38 x 38 38 x 57 51 x 57	1.5 x 1.5 1.5 x 2.2 2.0 x 2.2	Art.no.: Description:	ABC-18 Motor tilt-only 12 - 24 VDC 	RF + encoder	battery / rechargeable battery tube / transformer
	Head rail (mm) 25 x 25	1.0 x 1.0	Art.no.: Description:	ABC-17 Middle motor 12 - 24 VDC 	RF + encoder	battery / rechargeable battery tube / transformer
	Head rail (mm) 51 x 57	2.0 x 2.2	Art.no.: Description:	ABC-07-QC or - QMC Tubular motor 120 VAC - 230 V 	RF + encoder or mechanical limit switch	mains
	System type Absolute Roman Blind Regular roman blind		Art.no.: Description:	ABC-17 Middle motor tilt & lift 12 - 24 VDC 	RF + encoder	battery / rechargeable battery tube / transformer
	System type XL Roman Blind		Art.no.: Description:	ABC-06-QC or - QMC Tubular motor 120VAC - 230 VAC 	RF + encoder or mechanical limit switch	mains
	System type XL Roman Blind		Art.no.: Description:	ABC-06-C or - MC Tubular motor 120 VAC - 230 VAC 	RF + encoder or mechanical limit switch	mains
	System type XL Roman Blind		Art.no.: Description:	ABC-07-QC or - QMC Tubular motor 120VAC - 230 VAC 	RF + encoder or mechanical limit switch	mains

SELECTION TABLE

	Requirements								
Blind system	Max. width (m)		Max. height (meters) only applicable for mechanical limit switch		Max. surface (m ²)		Max. weight (kg)		
Vertical blind	m	in	m	in	m ²	ft ²	kg	lb	
	ca. 6,0	ca. 236.2	no limit	no limit	ca. 18	ca. 194	25,0	55.1	
Panel blind									
	ca. 6,0	ca. 236.2	no limit	no limit	ca. 18	ca. 194	15,0	33.1	
Pleated blind									
	ca. 3,0	ca. 118.1	ca. 2,7	106.3	ca. 9	ca. 97	4,0	8.8	
	ca. 5,0	ca. 196.9	ca. 4,5* / 5,0	ca. 177.2* / 196.9	ca. 25	ca. 269	8,0	17.6	
	ca. 5,0	ca. 196.9	ca. 4,5* / 5,0	ca. 177.2* / 196.9	ca. 25	ca. 269	12,0	26.5	
Curtain									
	ca. 12,0	ca. 472.4	no limit	no limit	ca. 42	ca. 452	50,0	110.2	

* when using mechanical motor

** caution: limit screws might not be easily accesible

SELECTION TABLE

			Motor solution			
	Application		Motor		Type	Power supply options
	mm	in				
	System type Absolute Vertical Blind		Art.no.: Description:	ABC-03-LW Vertical blind motor 12 - 24 VDC 	RF + encoder	battery / rechargeable battery tube / transformer
	System type Absolute Panel Blind 3-4-5 way		Art.no.: Description:	ABC-04-LW Panel blind motor 12 - 24 VDC 	RF + encoder	battery / rechargeable battery tube / transformer
	System type Absolute Pleated Blind Head rail (25 mm)	1.0	Art.no.: Description:	ABC-17 Middle motor 12 - 24 VDC 	RF + encoder	battery / rechargeable battery tube / transformer
	System type XL Pleat Blind		Art.no.: Description:	ABC-06-QC or - QMC** Tubular motor 120 VAC - 230 VAC 	RF + encoder or mechanical limit switch	mains
	System type XL Pleat Blind		Art.no.: Description:	ABC-06-C or - MC** Tubular motor 120 VAC - 230 VAC 	RF + encoder or mechanical limit switch	mains
	System type Curtain rail		Art.no.: Description:	ABC-23-W Curtain motor 120 VAC - 230 VAC	RF + encoder	mains

OVERVIEW ABSOLUTE CONTROL

Motors

Art.code	Description	Power supply	Rated current	Rated power	Torque		Speed	Operating temperature	
ABC-02	Tilt-only motor 25 mm	4x AAA 1.5 V alkaline	/	/	/		/	5 - 60°C	41 - 140°F
ABC-18	Tilt-only motor 35 - 50 mm	12 - 24 V DC	0,3 A	3 W	0,65 Nm	5.75 in - lb	/	5 - 60°C	41 - 140°F
ABC-17	Middle motor	12 - 24 V DC	0,6 A	7 W	0,65 Nm	5.75 in - lb	39 rpm	5 - 60°C	41 - 140°F
ABC-04-LW	Panel blind motor	12 - 24 V DC	0,6 A	7 W	/		3,75 m / min - 12.3 ft / min	5 - 60°C	41 - 140°F
ABC-03-LW	Vertical blind motor	12 - 24 V DC	1,5 A	18 W	0,68 Nm	6 in - lb	4 m / min - 13.1 ft / min	5 - 60°C	41 - 140°F
ABC-05	Tubular motor	12 - 24 V DC	0,6 A	7 W	0,60 Nm	5.3 in - lb	28 rpm	5 - 60°C	41 - 140°F
ABC-06-MC	Tubular motor mechanical	230 V AC / 50 Hz	0,53 A	121 W	6 Nm	53 in - lb	28 rpm	5 - 60°C	41 - 140°F
ABC-06-QMC	Tubular motor mechanical silent	230 V AC / 50 Hz	0,57 A	133 W	4 Nm	35 in - lb	28 rpm	5 - 60°C	41 - 140°F
ABC-06-C	Tubular motor electronic	230 V AC / 50 Hz	0,62 A	144 W	6 Nm	53 in - lb	28 rpm	5 - 60°C	41 - 140°F
ABC-06-QC	Tubular motor electronic silent	230 V AC / 50 Hz	0,57 A	133 W	4 Nm	35 in - lb	28 rpm	5 - 60°C	41 - 140°F
ABC-06-MC120	Tubular motor mechanical	120 V AC / 60 Hz	0,85 A	102 W	6 Nm	53 in - lb	33 rpm	5 - 60°C	41 - 140°F
ABC-06-QMC120	Tubular motor mechanical silent	120 V AC / 60 Hz	0,85 A	102 W	4 Nm	35 in - lb	33 rpm	5 - 60°C	41 - 140°F
ABC-06-C120	Tubular motor electronic	120 V AC / 60 Hz	0,85 A	102 W	6 Nm	53 in - lb	33 rpm	5 - 60°C	41 - 140°F
ABC-06-QC120	Tubular motor electronic silent	120 V AC / 60 Hz	0,85 A	102 W	4 Nm	35 in - lb	33 rpm	5 - 60°C	41 - 140°F
ABC-07-QMC	Tubular motor mechanical silent	230 V AC / 50 Hz	0,57 A	133 W	8 Nm	70 in - lb	15 rpm	5 - 60°C	41 - 140°F
ABC-07-QC	Tubular motor electronic silent	230 V AC / 50 Hz	0,57 A	133 W	8 Nm	70 in - lb	15 rpm	5 - 60°C	41 - 140°F
ABC-07-QMC120	Tubular motor mechanical silent	120 V AC / 60 Hz	0,85 A	102 W	8 Nm	70 in - lb	17 rpm	5 - 60°C	41 - 140°F
ABC-07-QC120	Tubular motor electronic silent	120 V AC / 60 Hz	0,85 A	102 W	8 Nm	70 in - lb	17 rpm	5 - 60°C	41 - 140°F
ABC-23-W	Curtain motor	230 V AC / 50 Hz	0,23 A	45 W	0,8 Nm	7 in - lb	20 cm / s - 7.9 in / s	5 - 60°C	41 - 140°F
ABC-23-W120	Curtain motor	120 V AC / 60 Hz	0,48 A	55 W	0,8 Nm	7 in - lb	24 cm / s - 9.4 in / s	5 - 60°C	41 - 140°F

Controls

Art.code	Description	Power supply						Operating temperature	
ABC-01	Five channel remote control	CR2032 1.5 V						5 - 60°C	41 - 140°F
ABC-20	Single channel remote control	CR2032 1.5 V						5 - 60°C	41 - 140°F
ABC-26	Wall switch	CR2430 3.0 V						5 - 60°C	41 - 140°F
ABC-19	Domotica box	12 - 24 V DC						5 - 60°C	41 - 140°F
ABC-22	Transfer box	12 - 24 V DC						5 - 60°C	41 - 140°F

Power supplies

Art.code	Description	Input	Output					Operating temperature	
ABC-13	Battery tube	10 x AA 1.5 V alkaline	15V DC					5 - 60°C	41 - 140°F
ABC-24	Rechargeable battery tube	/	14,8V 2600 mAh					5 - 60°C	41 - 140°F
ABC-25	Charger for ABC 24	100 - 240 VAC 50 / 60Hz 0.6A	16,8V === 1,5A					5 - 60°C	41 - 140°F
ABC-11	Transformer	100 - 240 VAC 50 / 60Hz	24V DC - 1,0A					5 - 60°C	41 - 140°F
ABC-10	Extension Wire	/	/					5 - 60°C	41 - 140°F

* = without domotica box

** = max 32 channels is only for 2,4Ghz to 433Mhz and for 433Mhz to 2,4Ghz when using left and right buttons

OVERVIEW ABSOLUTE CONTROL

Operating time	Max. channels to pair	Max. number of rotations	Weight		Radiofrequency	Suitable for home automation	Cable lenght		Degree of protection	Product certificate
no limit	32	12 sec.	65 g	2.3 oz	2.4 Ghz	No	/		/	CE
no limit	32	no limit	135 g	4.8 oz	2.4 Ghz	Yes	/		/	CE FC
no limit	32	no limit	200 g	7.0 oz	2.4 Ghz	Yes	/		/	CE FC
no limit	32	no limit	220 g	7.8 oz	2.4 Ghz	Yes	/		/	CE FC
no limit	32	no limit	420 g	14.8 oz	2.4 Ghz	Yes	/		/	CE FC
no limit	32	no limit	170 g	6 oz	2.4 Ghz	Yes	/		/	CE FC
4 min.	/	30	1350 g	47 oz	/	Yes*	2 m	6.5 ft	IP44	CE Δ
4 min.	/	30	1350 g	47 oz	/	Yes*	2 m	6.5 ft	IP44	CE Δ
4 min.	32	no limit	1440 g	50 oz	2.4 Ghz	Yes	2 m	6.5 ft	IP44	CE Δ
4 min.	32	no limit	1440 g	50 oz	2.4 Ghz	Yes	2 m	6.5 ft	IP44	CE Δ
4 min.	/	30	1350 g	47 oz	/	Yes*	2 m	6.5 ft	IP44	UL
4 min.	/	30	1350 g	47 oz	/	Yes*	2 m	6.5 ft	IP44	UL US
4 min.	32	no limit	1440 g	50 oz	2.4 Ghz	Yes	2 m	6.5 ft	IP44	FC
4 min.	32	no limit	1440 g	50 oz	2.4 Ghz	Yes	2 m	6.5 ft	IP44	UL US FC
4 min.	/	30	1350 g	47 oz	/	Yes*	2 m	6.5 ft	IP44	CE Δ
4 min.	32	no limit	1440 g	50 oz	2.4 Ghz	Yes	2 m	6.5 ft	IP44	CE Δ
4 min.	/	30	1350 g	47 oz	/	Yes*	2 m	6.5 ft	IP44	UL US
4 min.	32	no limit	1440 g	50 oz	2.4 Ghz	Yes	2 m	6.5 ft	IP44	UL US FC
4 min.	32	no limit	1150 g	41 oz	2.4 Ghz	Yes	2 m	6.5 ft	IP20	CE Δ
4 min.	32	no limit	1150 g	41 oz	2.4 Ghz	Yes	2 m	6.5 ft	IP20	UL US FC

	Max. motors to pair		Weight		Radio frequency				Product certificate
	no limit		56 g	2 oz	2.4 Ghz				CE FC
	no limit		56 g	2 oz	2.4 Ghz				CE FC
	no limit		40 g	1.29 oz	2,4 Ghz				CE FC
	no limit		200 g	7 oz	2.4 Ghz				CE
	32**		35 g	1.2 oz	2.4 Ghz-433 Mhz				CE

			Weight				Cable lenght			Product certificate
			150 g	5.3 oz			23 cm	9 in		/
			200 g	7 oz			30 cm	11.8 in		/
			-	-			3,75 m	12.3 ft		/
			270 g	9,5 oz			3,75 m	12.3 ft		CE UL US FC
			240 g	8.5 oz			10 m	32.8 ft		/



INFORMATION & DOCUMENTATION

For more information, assembly manuals and calculation sheets contact us at info@coulisse.com

ABOUT COULISSE

Since its establishment in 1992, Coulisse has grown into a leading international supplier of window coverings for both made-to-measure products and the DIY market. Our innovative strength is shown and expressed in inspiring collections and advanced system solutions. Our complete range offers customers endless possibilities to be distinctive in the market and to meet the ever-changing demands of end users.

8



rtube.nl/red427

Coulisse B.V. Vonderweg 48 7468 DC Enter The Netherlands
t +31 547 85 55 55 f +31 547 85 55 50 e info@coulisse.com

coulisse.com